

1601 GOLD STANDARD™ CALIBRATION COMPRESSION-ONLY LOAD CELL (U.S. & METRIC)



FEATURES & BENEFITS

- Capacities from 1K to 100K lbf (4.5 to 450 kN)
- 0.01% creep
- High output – to 4mV/V
- High precision base installed
- 3 run NIST traceable ASTM E74 calibration
- Eccentric load compensated
- 0.0008%/°F temperature effect on output
- 4% lower load limit

STANDARD CONFIGURATION



Model 1621BBI-50K (Shown)

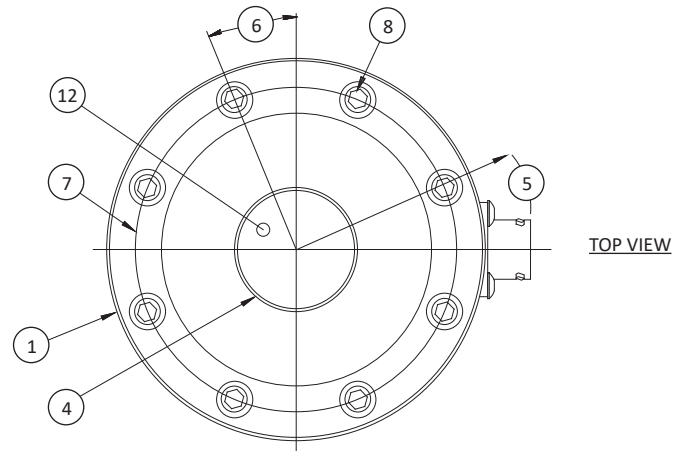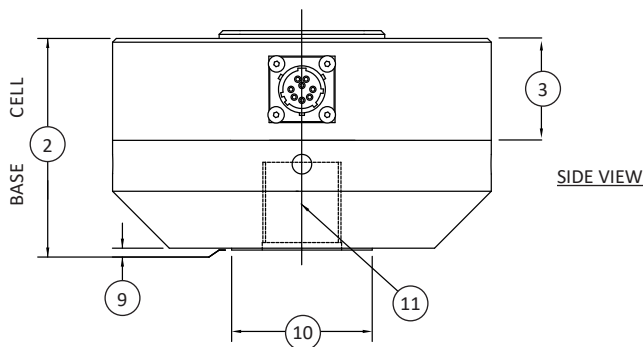

DIMENSIONS

See Drawing	MODEL					
	1611		1621		1633	
	CAPACITY					
	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)
	1K, 2K, 5K, 10K	4.5, 9, 22, 45	25K, 50K	110, 225	100K	450
	in	mm	in	mm	in	mm
(1)	Ø4.13	Ø104.8	Ø6.06	Ø153.9	Ø8.00	Ø203.2
(2)	2.50	63.5	3.50	89.0	4.50	114.3
(3)	1.25	31.7	1.63	41.4	2.25	57.2
(4)	Ø1.34	Ø34.0	Ø2.41	Ø61.2	Ø3.76	Ø95.5
(5)	2.78	70.0	3.50	89.0	4.47	113.0
(6)	22.5°	22.5°	15.0°	15.0°	11.25°	11.25°
(7)	Ø3.50	Ø88.9	Ø5.13	Ø130.3	Ø6.50	Ø165.1
(8)	8 Places		12 Places		16 Places	
(9)	0.03	0.8	0.03	0.8	0.03	0.8
(10)	Ø1.25	Ø31.8	Ø2.25	Ø57.2	Ø3.00	Ø76.2
(11)	⅝-18 UNF-3B ↓ 0.87	M16x2-4H ↓ 22.1	1 ¼-12 UNF-3B ↓ 1.40	M33x2-4H ↓ 35.6	1 ¾-12 UNF-3B ↓ 1.75	M42x2-4H ↓ 44.5
(12)	SR 6.00	SR 152.0	SR 8.00	SR 203.0	SR 12.0	SR 305.0

1601 GOLD STANDARD™ CALIBRATION COMPRESSION-ONLY LOAD CELL (U.S. & METRIC)

SPECIFICATIONS

PARAMETERS		MODEL										
		1611		1611		1611		1621		1633		
		CAPACITY										
		U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)	
		1K	4.5	2K	9	5K, 10K	22, 45	25K, 50K	110, 225	100K	450	
ACCURACY – (MAX ERROR)												
Static Error Band – %FS		±0.02		±0.02		±0.025		±0.03		±0.04		
Nonlinearity – %FS		±0.03		±0.03		±0.04		±0.04		±0.04		
Hysteresis – %FS		±0.02		±0.02		±0.04		±0.04		±0.05		
Nonrepeatability – %RO		±0.005		±0.005		±0.005		±0.005		±0.005		
Creep, in 20 min – %		±0.01		±0.01		±0.01		±0.01		±0.01		
Side Load Sensitivity – %		±0.1		±0.1		±0.1		±0.1		±0.1		
Eccentric Load Sensitivity – % / in		±0.1		±0.1		±0.1		±0.1		±0.1		
Lower Load Limit – % Cap. (ASTM E74 Class A)		4.0		4.0		4.0		4.0		4.0		
TEMPERATURE												
Compensated Range		°F	+15 to +115		+15 to +115		+15 to +115		+15 to +115		+15 to +115	
		°C	-10 to +45		-10 to +45		-10 to +45		-10 to +45		-10 to +45	
Operating Range		°F	-65 to +200		-65 to +200		-65 to +200		-65 to +200		-65 to +200	
		°C	-55 to +90		-55 to +90		-55 to +90		-55 to +90		-55 to +90	
Effect on Zero – %RO / deg		°F	±0.0004		±0.0004		±0.0004		±0.0004		±0.0004	
Effect on Output – % / deg		°F	±0.0008		±0.0008		±0.0008		±0.0008		±0.0008	
ELECTRICAL												
Rated Output – mV/V (Nominal)		2.0		2.0		4.0		4.0		4.0		
Excitation Voltage – VDC MAX		20		20		20		20		20		
Bridge Resistance – Ohm (Nominal)		350		350		350		350		350		
Zero Balance – %RO		±1.0		±1.0		±1.0		±1.0		±1.0		
Insulation Resistance – Megohm		5000		5000		5000		5000		5000		
MECHANICAL												
Safe Overload – %CAP		±150		±150		±150		±150		±150		
Deflection @ RO		in	0.002		0.002		0.004		0.004		0.006	
		mm	0.05		0.05		0.10		0.10		0.15	
Weight		lbs	3.3		3.3		7.5		21.5		52	
		kg	1.5		1.5		3.4		1.75		23.59	
Calibration		Compression										
Material		Alloy steel										

OPTIONS

- Connector protection
- Standardized output
- Transducer Electronic Data Sheet (TEDS)
- Custom calibration
- Multiple bridge
- Special threads
- Dual diaphragm
- Special temperature range

CONNECTOR

- PT02E-12-8P

ACCESSORIES

- Mating connector
- Mating cable
- Instrumentation
- Loading hardware
- Calibration software

 **Alava Ingenieros**
GRUPO ALAVA

tel: +34 915 679 700
www.alavaingenieros.com | alava@grupoalava.com

International System of Units (SI) dimensions and capacities are provided for conversion only. Standard products have U.S. capacities and dimensions. SI capacities available upon special request and at an additional cost.