
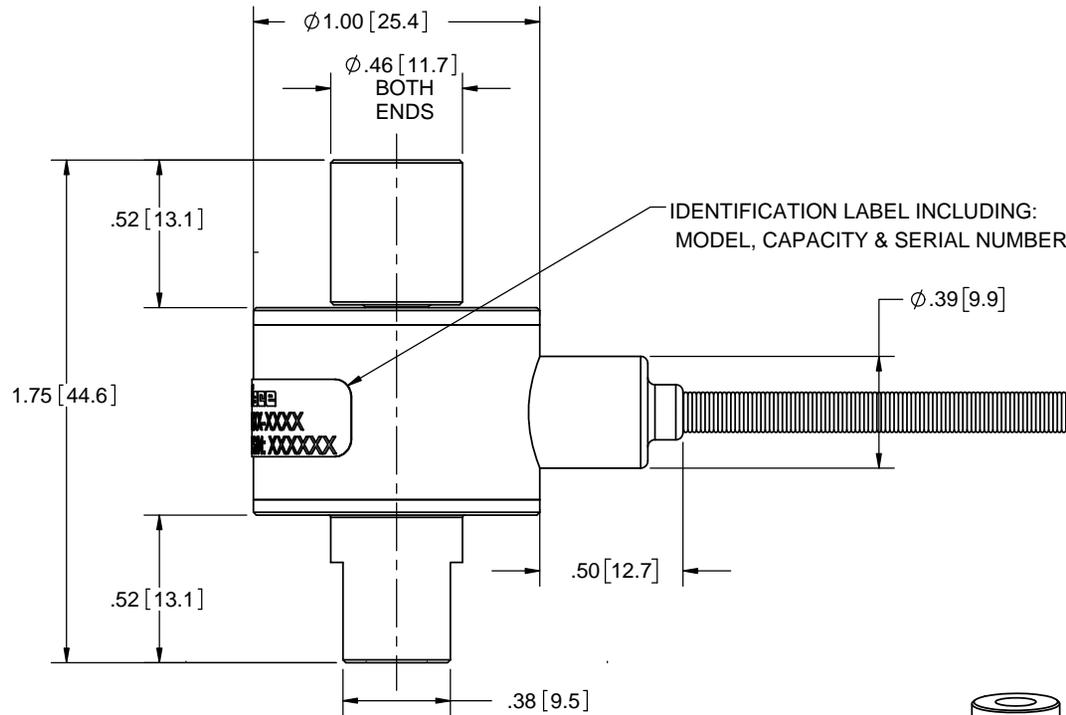
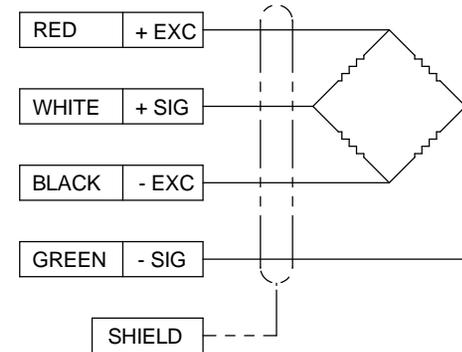


LOAD CELL CHARACTERISTICS	
CAPACITY	500 gf, 1000 gf

Interface Inc. claims proprietary rights in the information disclosed herein. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown herein without written permission of Interface Inc. The drawing shall remain the property of Interface Inc. and shall be returned upon request by Interface Inc.

80737


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	INITIAL RELEASE	5/19/08	
C	ADDED 500 gf CAPACITY	1/06/09	
D	REDRAWN, UPDATED TO CURRENT STANDARDS; CORRECTED THRU HOLE ORIENTATION IN BASE CAP (BOTTOM VIEW)	09/20/16	DLC

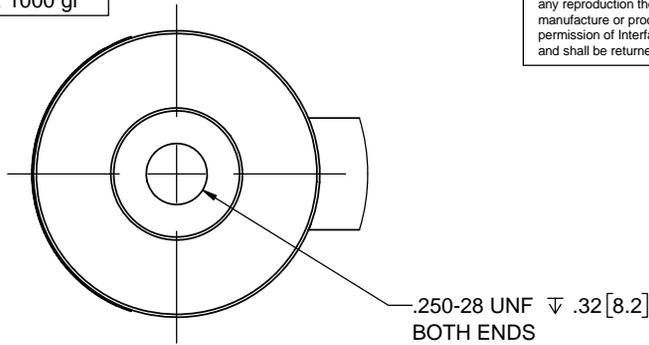

 **Alava Ingenieros**
GRUPO ALAVA

www.alavaingenieros.com | alava@grupoalava.com

- 2. FULL SCALE DEFLECTION:
1000 g: 0.001"
500 g: 0.0005"
- 1 STANDARD CABLE LENGTH IS 5 ft (1.5 m).
NON STANDARD CABLE LENGTH BY OPTION CODE.

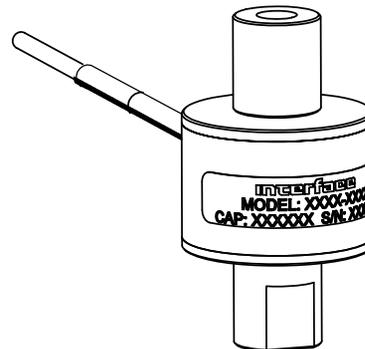

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [mm]	
TOLERANCES ARE:	
ANGLES	$\pm 0^{\circ} 30'$
.XX	$\pm .01$ [0.25]
.XXX	$\pm .005$ [0.13]
CREATOR	DATE
DESIGNED:	
DETAILED: JEP	05/19/08
WEIGHT: (APPROX) 0.14 (lbs)	

interface	
ADVANCED FORCE MEASUREMENT	
7401 E. BUTHERUS DR. SCOTTSDALE, AZ USA 85260	
TITLE:	
OUTLINE MODEL: WMCFP-500G, 1000G	
SIZE: DWG. NO:	80737
SCALE: 1.5:1	SHEET 1 OF 1
REV:	D