

WMCP STAINLESS STEEL LOAD CELL (U.S. & METRIC)

FEATURES & BENEFITS

- Capacities from 500 to 1000 gf (1.1 to 2.2 lbf)
- Proprietary Interface temperature compensated in gages
- Tension and compression
- Small size
- Environmentally sealed
- Overload protected to 8x capacity

SPECIFICATIONS

CAPACITY	Metric (gf)	500	1000
	U.S. (lbf)	1.1	2.2
ACCURACY – (MAX ERROR)			
Nonlinearity – %FS		±0.15	
Hysteresis – %FS		±0.15	
Nonrepeatability – %RO		±0.15	±0.1
Creep, in 20 min – %		±0.1	±0.05
TEMPERATURE			
Compensated Range	°C	+10 to +66	
	°F	+50 to +150	
Operating Range	°C	-54 to +121	
	°F	-65 to -250	
Effect on Output – % / deg	°F	±0.20	
Effect on Zero – %RO / deg	°F	±2.00	±1.00
ELECTRICAL			
Rated Output – mV/V (Nominal)		0.75 (±0.15)	1.50 (±0.30)
Zero Balance – %RO		±2.0	
Bridge Resistance – Ohm (Nominal)		350 (±3.5)	
Excitation Voltage – VDC or VAC MAX		7	
Insulation Resistance – Megohm		5000	
MECHANICAL			
Calibration		Tension	
Safe Overload – %CAP		1600	800
Deflection @RO	mm	0.127	0.254
	in	0.005	0.010
Weight	kg	0.08	
	lbs	0.18	
Material		Stainless steel	

OPTIONS

- Special calibration
- Standard output
- Special temperature range
- Custom calibration
- Add connector to cable
- Transducer Electronic Data Sheet (TEDS)


ACCESSORIES

- Instrumentation

STANDARD CONFIGURATION



Model WMCP - 1000G (Shown)

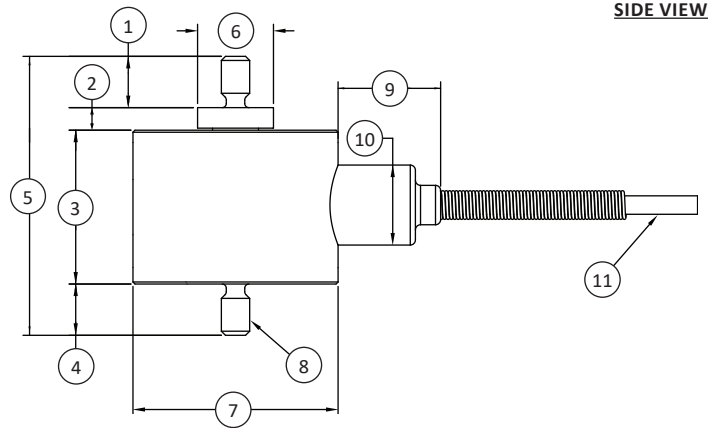

SIDE VIEW

DIMENSIONS

See Drawing	CAPACITY	
	Metric (gf)	U.S. (lbf)
	500, 1000	1.1, 2.2
	mm	in
(1)	6.4	0.25
(2)	2.8	0.11
(3)	19.1	0.75
(4)	6.4	0.25
(5)	34.5	1.36
(6)	Ø9.4	Ø0.37
(7)	Ø25.4	Ø1.00
(8)	#6-32 UNC-3A (Both Ends)	
(9)	12.7	0.50
(10)	Ø9.9	Ø0.39
(11)	Ø2.3	Ø0.09

CONNECTOR OPTIONS

- 1.5 m (5 ft) integral cable

International System of Units (SI) dimensions and capacities are provided for conversion only. Standard products have U.S. capacities and dimensions. SI capacities available upon special request and at an additional cost.